

The following horn speakers feature a transformer which makes them suitable for high impedance (25, 70 and 100 V) voltage line installations. Their power taps (from 10 to 30 W) ensure an efficient sound diffusion in medium-size installations.

They are made of ABS plastic and have a high IP range (66). They also feature stainless steel handles, being all adequate for alarm systems in outdoor applications.

Features

- Horn speakers made of strong ABS plastic.
- Highly resistant speakers, with 66 IP range.
- Suitable for high impedance (100 V) voltage line installations.
- Up to 30 W power, depending on model.
- Suitable for medium-size outdoor applications.




SC 10 AH



SC 15 AH



SC 30 AH

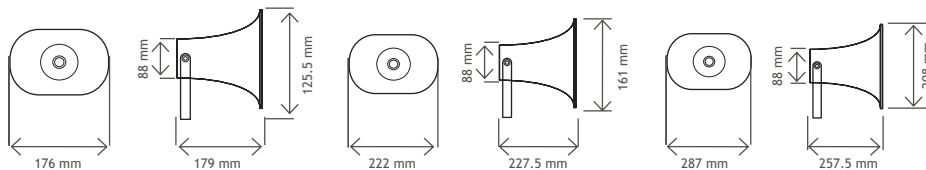

Technical data	SC 10 AH	SC 15 AH	SC 30 AH
Type:	Horn speaker.	Horn speaker.	Horn speaker.
Power taps (100 V line):	10 W (1 kΩ) / 5 W (2 kΩ) / 3 W (3k3 Ω) / 1 W (10 kΩ).	15 W (666 Ω) / 10 W (1 kΩ) / 5 W (2 kΩ) / 3 W (3k3 Ω) / 1 W (10 kΩ).	30 W (333 Ω) / 15 W (666 Ω) / 7.5 W (1k3 Ω) / 3 W (3k3 Ω) / 1 W (10 kΩ).
Power taps (70 V line):	5 W (980 Ω) / 2.5 W (1k9 Ω) / 1.5 W (3k2 Ω) / 0.5 W (9k8 Ω).	7.5 W (653 Ω) / 2.5 W (1k9 Ω) / 1.5 W (3k2 Ω) / 0.5 W (9k8 Ω).	15 W (326 Ω) / 7.5 W (653 Ω) / 3.75 W (1k3 Ω) / 1.5 W (3k2 Ω) / 0.5 W (9k8 Ω).
Power taps (25 V line):	10 W (250 Ω).	15 W (166 Ω).	30 W (83 Ω).
Frequency response:	315 Hz - 12k5 Hz.	280 Hz - 12k5 Hz.	250 Hz - 16 kHz.
Sensitivity (1W/1m):	93 dB.	94 dB.	93 dB.
Max. SPL.:	103 dB.	105 dB.	107 dB.
IP range:	IP 66.	IP 66.	IP 66.
RAL colour code:	1002.	1002.	1002.
Material (housing):	ABS plastic.	ABS plastic.	ABS plastic.
Dimensions:	Ø 176 x 179 mm.	Ø 222 x 227.5 mm.	Ø 287 x 257.5 mm.
Weight:	1 kg.	1.6 kg.	2 kg.