



PURE PRO Series



CPRO 4

CPRO 6

CPRO 8


User Manual / Manual de uso

Ver. 15.06.01


CPRO 4

CEILING SPEAKER




PURE PRO Series

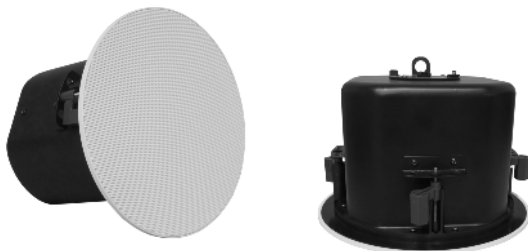

Dimensions

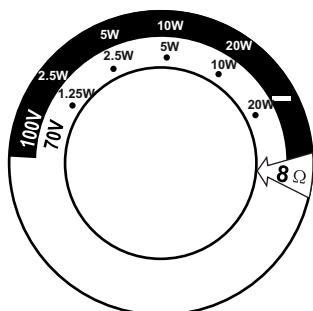

Output selector



Power Taps (70V).....	1,25W / 2,5W / 5W / 10W /20W
Power Taps (100V).....	2.5W / 5W / 10W / 20W
Low Impedance position.....	8Ω
Sensitivity (1W/1m)	87 dB
Frequency Response	90Hz - 20kHz
Dimensions	Ø 204 x 137 mm
Mounting Hole	Ø 180 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	2,1 Kg

Specifications are subject to change without notice


CPRO 6

CEILING SPEAKER




PURE PRO Series



Dimensions

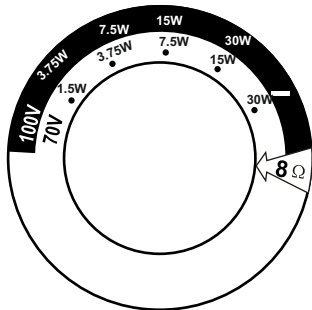

Output selector






267

Power Taps (70V)	1,5W / 3,75W / 7,5W / 15W / 30W
Power Taps (100V)	3,75W / 7,5W / 15W / 30W
Low Impedance position	8Ω
Sensitivity (1W/1m)	88 dB
Frequency Response	60Hz - 20kHz
Dimensions	Ø 267 x 162 mm
Mounting Hole	Ø 240 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	2,7 Kg

Specifications are subject to change without notice

CPRO 8 CEILING SPEAKER

PURE PRO Series

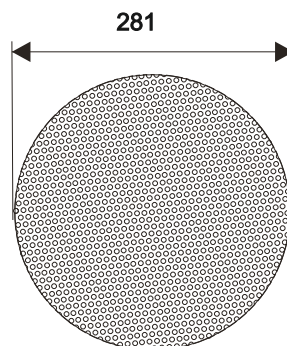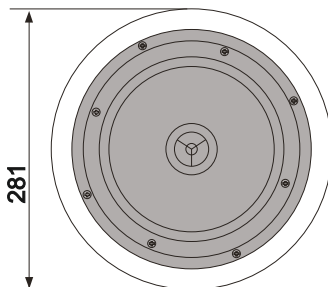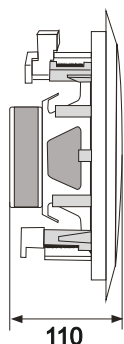**Dimensions**

Power Taps (100V)	10 W / 20W / 40W
Low Impedance position	8Ω
Sensitivity (1W/1m)	90 dB
Frequency Response	50Hz - 20kHz
Dimensions	Ø 281 x 110 mm
Mounting Hole	Ø 250 mm
Material (front baffle)	ABS
Material (grille)	Iron
Weight	2,61 Kg

Specifications are subject to change without notice


CPRO 4

ALTAVOZ DE TECHO




PURE PRO Series



Dimensiones

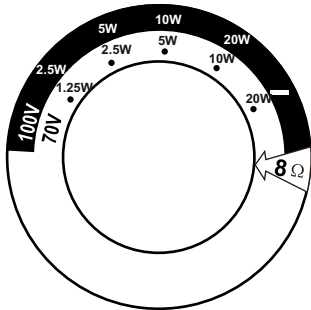

Selector de salida




Posic. de potencia (70V)	1,25W / 2,5W / 5W / 10W /20W
Posic. de potencia (100V)	2.5W / 5W / 10W / 20W
impedancia.....	8Ω
Sensibilidad (1W/1m)	87 dB
Respuesta en Frecuencia	90Hz - 20kHz
Dimensiones	Ø 204 x 137 mm
Dimensiones de montaje	Ø 180 mm
Material	ABS
Material (rejilla)	Hierro
Peso	2,1 Kg

Especificaciones sujetas a cambio sin previo aviso




CPRO 6

ALTAVOZ DE TECHO

PURE PRO Series

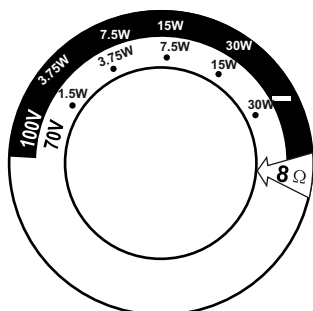**Dimensiones**

Selector de salida



267





Posic. de potencia (70V)	1,5W / 3,75W / 7,5W / 15W / 30W
Posic. de potencia (100V)	3,75W / 7,5W / 15W / 30W
Posición baja impedancia.....	8Ω
Sensibilidad (1W/1m)	88 dB
Respuesta en frecuencia	60Hz - 20kHz
Dimensiones	Ø 267 x 162 mm
Dimensiones de montaje	Ø 240 mm
Material	ABS
Material (rejilla)	Hierro
Peso	2,7 Kg

Especificaciones sujetas a cambio sin previo aviso

CPRO 8

ALTAVOCES DE TECHO

PURE PRO Series

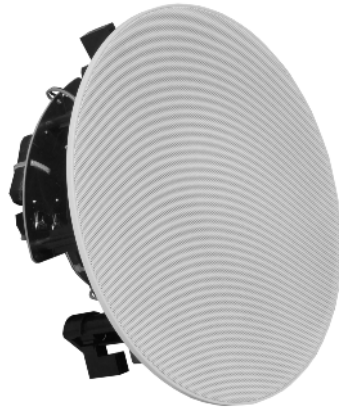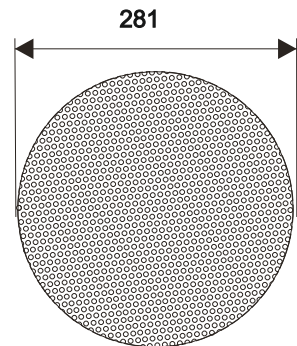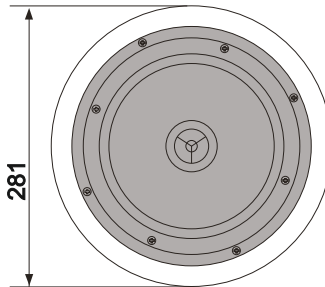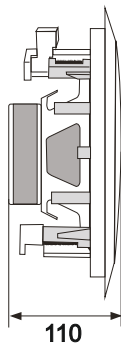**Dimensiones**

Posic. de potencia (100V)	10 W / 20W / 40W
Posición baja impedancia.....	8Ω
Sensibilidad(1W/1m)	90 dB
Respuesta en frecuencia	50Hz - 20kHz
Dimensiones	Ø 281 x 110 mm
Dimensiones de montaje	Ø 250 mm
Material	ABS
Material (rejilla)	Hierro
Peso	2,61 Kg

Especificaciones sujetas a cambio sin previo aviso



EQUIPSON, S.A.

Avda. El Saler, 14 - Pol. Ind. L'Alteró, 46460 - Silla (Valencia) Spain

Tel. +34 96 121 63 01 Fax + 34 96 120 02 42

www.workproaudio.com support@work.es