


IBZA P204: Ultra-Compact Full Range Loudspeaker

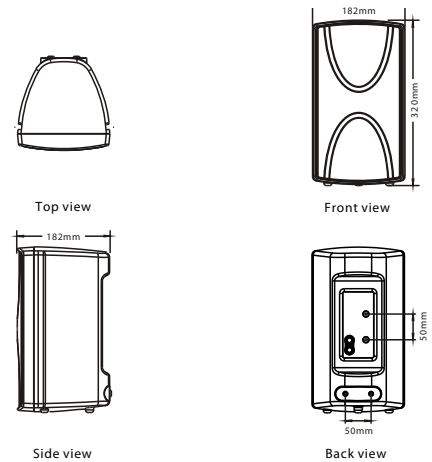

MAIN APPLICATIONS

- Background Music in restaurants, club, airports
- Museums and AV spaces
- Convention centres
- Hotels
- Sports Stadia

MAIN FEATURES

- Compact two-way passive system
- Weatherproof plastic
- 16 Ω nominal impedance
- Mounting accessories

DESCRIPTION

The P204 is a 16 Ohm Compact Full Range weatherproof plastic Loudspeaker, designed to be used as a sound reinforcement speaker in a wide variety of audio applications.

The double high sensitivity 4" cone transducer and the 25mm silk soft dome tweeter produce 111 dB spl and a wide operating frequency range of 80 Hz to 20 kHz sound quality for foreground or background music, being voice for maximum speech clarity and intelligibility.

The enclosure includes a special mounting bracket with an adjustable splay angle of 10° vertically. The 3 support base provide by the flat bottom surface of the cabinet, allow also the speaker to be set on a surface such as shelf.

Frequency Response	80 Hz - 20 kHz*
Frequency Response: Free Field	86 Hz - 16 kHz ±3 dB
SPL (1m)	111 dBspl
Maximum Peak SPL	117dBspl
Transducers: Low/High Frequency	Two 4" cone drivers and Ø 25mm x 1
Sensitivity (1W/1m)	92dB
Dispersions (HxV)	120° x 120°
Power (RMS)	80 W
Power (Program)	160 W
Power (Peak)	320 W
Rate Impedance	16 Ω
Input Connectors	Binding Post
NET Weight	4.5 kg (9,92 lbs)
Dimensions	182 x 182 x 320 mm (WxDxH) (7.17" x 7.17" x 12.6")
Construction	Weatherproof plastic. Finished in Black or White
Protective Grille	Powder coated perforated steel with acoustically transparent reticulated foam

*Recommended maximum operating frequency range. Response depends on loading conditions and room acoustics.



Pº Ind. Monte Boyal, C/Encinar 282
45950 Casarrubios del Monte (Toledo), SPAIN.
Phone: +34 918 170 110
Fax: +34 918 183 053
www.tecnaire.com
sales@tecnaire.com